Creative Fabrica

Embroidery Design
Sewing Information

www.creativefabrica.com/embroidery/

© Creative Fabrica

1, St: 230
Scarlet

2, St: 633
Pale Pink

3, St: 320
Apple Green

4, St: 305
Black

5, St: 425
Mint Green

6, St: 83
Black

7, St: 70
Pale Pink

8, St: 316
Ultramarine



9, St: 428
Magenta

10, St: 428
Isle Green

11, St: 360
Orange

12, St: 291
Electric Blue

13, St: 813
Orange

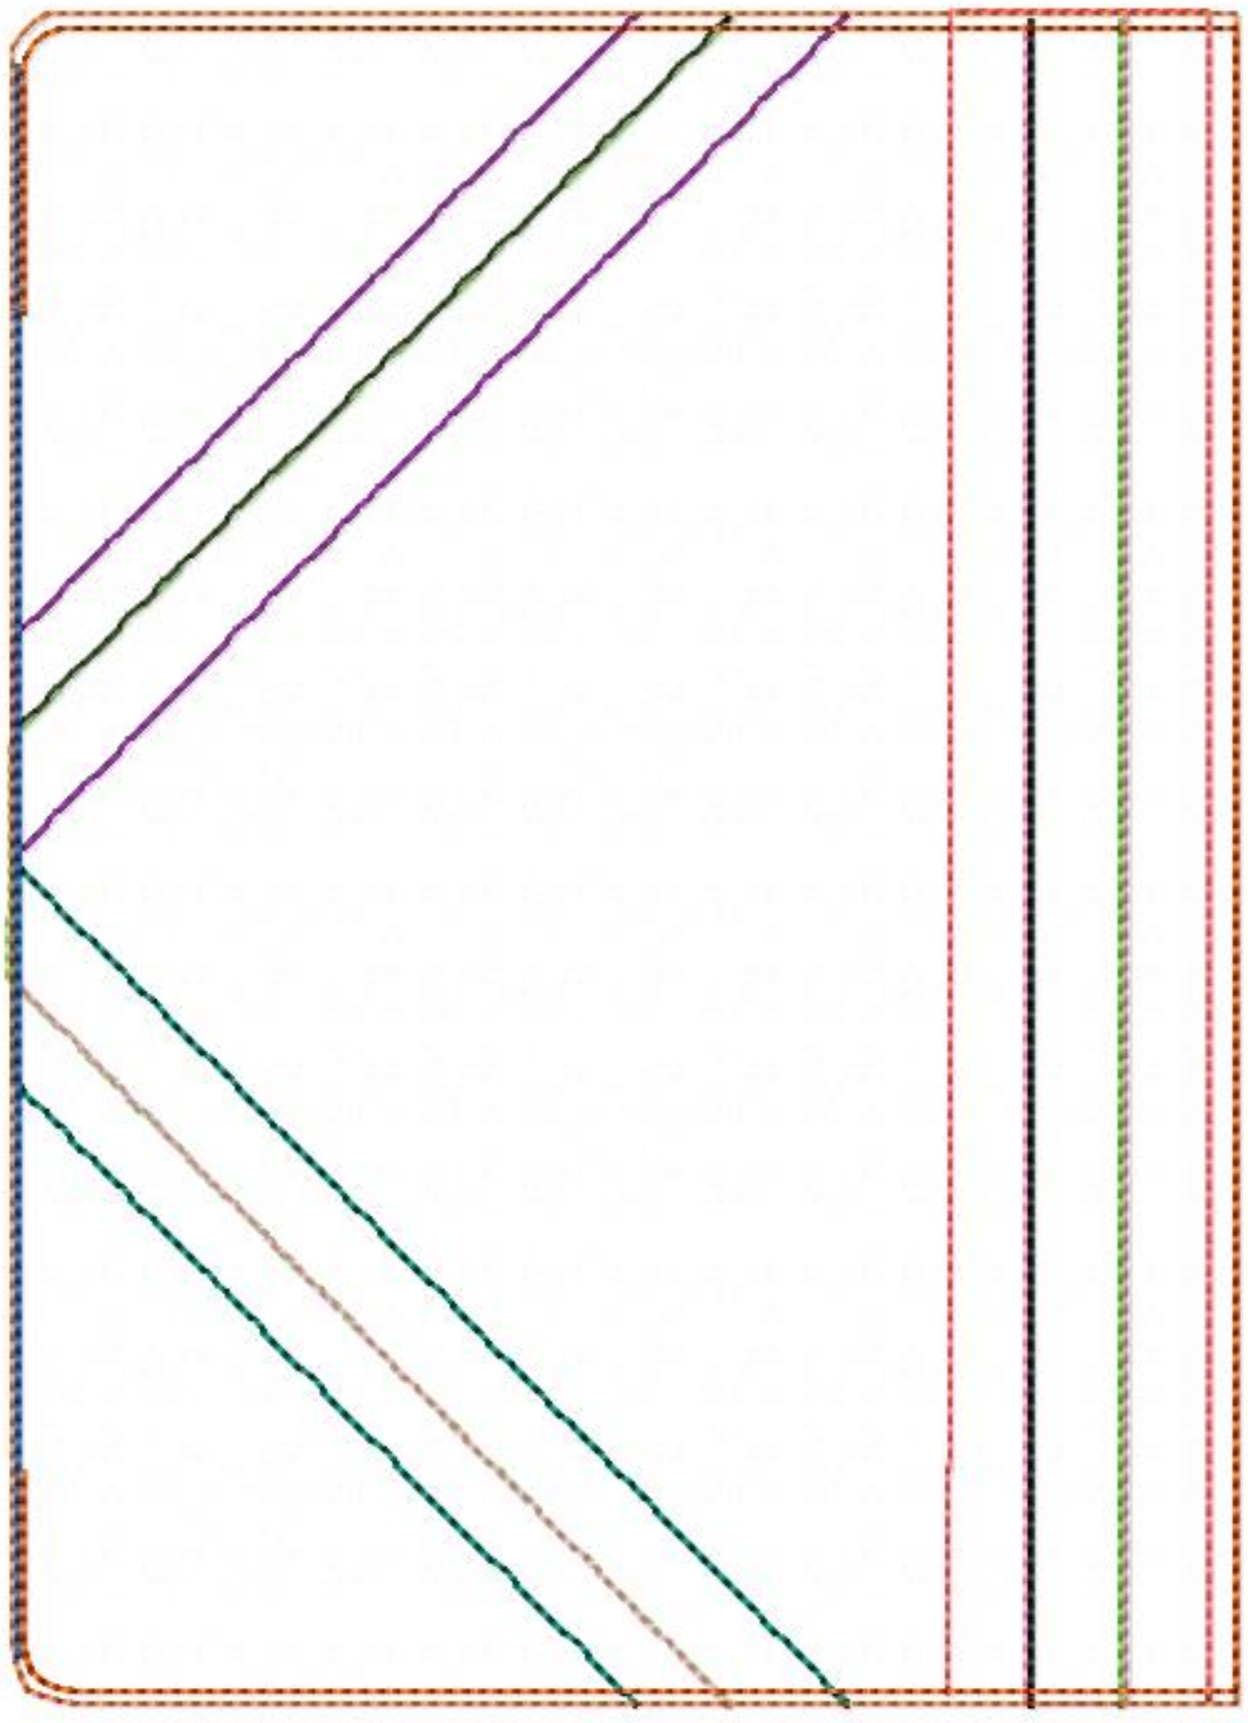

1, St: 327
Scarlet

2, St: 907
Pale Pink

3, St: 460
Apple Green

4, St: 440
Black

5, St: 571
Mint Green

6, St: 108
Black

7, St: 91
Pale Pink

8, St: 420
Ultramarine

9, St: 574
Magenta

10, St: 574
Isle Green

11, St: 485
Orange

12, St: 418
Electric Blue

13, St: 1078
Orange

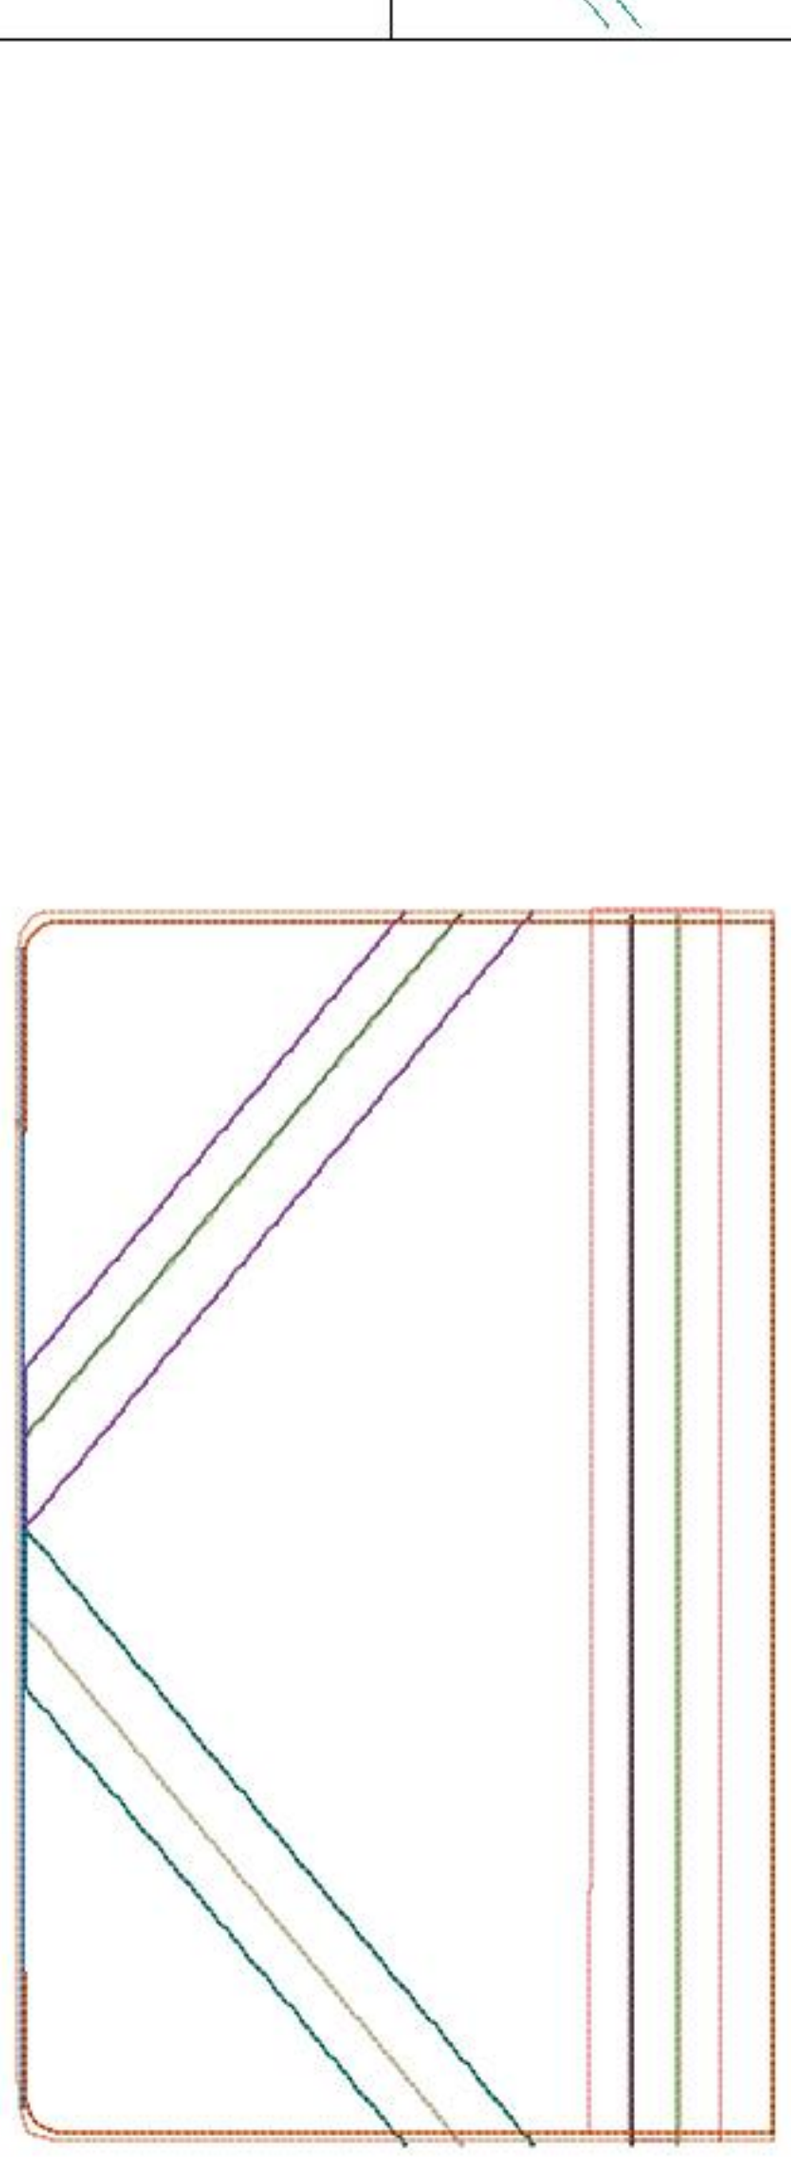

Diamond Diva Zipper Clutch

SWAST110

Tools:

- Embroidery Hoop to fit design
- Iron and ironing board (pressing surface)
- Rotary mat and ruler
- Cutting tools:
  - Fabric shears
  - Duckbill appliqué scissors
  - Short Sharp Scissors
  - Seam Ripper
  - Rotary Cutter
- Thread:
  - Embroidery thread to match design with matching bobbin
  - All purpose with matching bobbin
- Needles:
  - Embroidery 75/11 or Top Stitch 80/12
  - Universal 80/12
  - Hand Sewing
- Clear tape
- EZ Point and Turner
- Point turner
- Wonder clips

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Materials: measurements width by height

5x7:

- Sheer Cut away - Poly mesh to fit hoop

Fabric A (Black/White):

- Front Bottom Center 5”x8”

Fabric B (Red):

- (2) Front Bottom corners 4”x4”
- Back 6”x8”

Fabric C (Black/Red):

- Pocket 8”x10”

Fabric D (Gray):

- Front Top Lining 2”x8”
- Front Bottom Lining 5”x8”
- Back Lining 6”x8”

Cork:

- Top Front Cork 1”x8”
- (2) Front Bottom Cork pieces 1-1/4”x6”
- Cork Side Loop 1”x2”
- Cork Lanyard 2”x15”

Thin Fusible batting:

- Front Fusible Batting 5”x8”

Woven fusible interfacing:

- Pocket fusible interfacing 8”x5”

Foam (i.e. Soft and Stable by Annie)

- Back Foam 6”x8”

Zipper 10”

Hardware:

- D-ring 1”
- Lobster swivel clasp 1”

6x10:

- Sheer Cut away - Poly mesh to fit hoop

Fabric A (Black/White):

- Front Bottom Center 6”x12”

Fabric B (Red):

- (2) Front Bottom corners 7”x6”
- Back 9”x12”

Fabric C (Black/Red):

- Pocket 12”x12”

Fabric D (Gray):

- Front Top Lining 3”x12”
- Front Bottom Lining 6”x12”
- Back Lining 9”x12”

Cork:

- Top Front Cork 1-1/2”x12”
- (2) Front Bottom Cork pieces 2”x8”
- Cork Side Loop 1”x2”
- Cork Lanyard 2”x15”

Thin Fusible batting:

- Front Fusible Batting 6”x12”

Woven fusible interfacing:

- Pocket fusible interfacing 12”x6”

Foam (i.e. Soft and Stable by Annie)

- Back Foam 9”x12”

Zipper 14”

Hardware:

- D-ring 1”
- Lobster swivel clasp 1”

Copyright 2018 ©Sue O’Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Steps

1. Thread machine with matching bobbin. Insert new embroidery needle (not shown). Fold **pocket** in half by height and press wrong sides together. On one half fuse, **Pocket Fusible Interfacing** to the wrong side. Fuse the, **Front Fusible batting** to the wrong side of the **Front Bottom Center**.

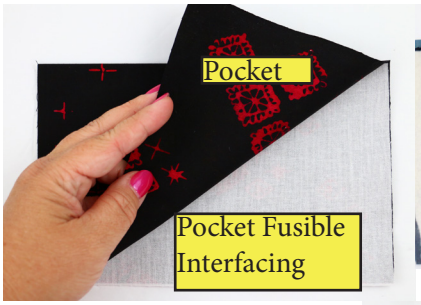

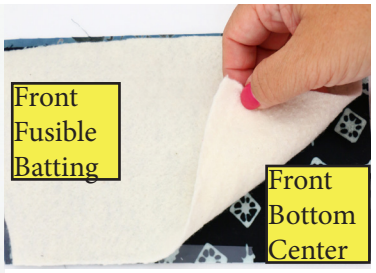

2. Hoop cut away stabilizer. Insert hoop into machine and sew **Stitch #1**, the placement stitch for the zipper.

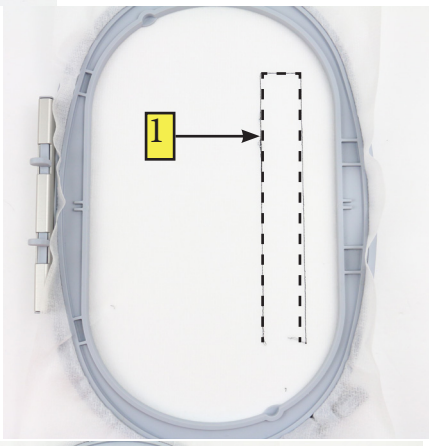

3. Remove hoop and place on a flat surface. ***Do not remove materials from hoop.** Place closed zipper centered within height, with zipper pull to the top about 1" past the top of the stitching.

4. Secure with tape. Insert hoop into machine. Sew **Stitch #2**, the zipper secure stitch. Remove hoop and place on a flat surface. ***Do not remove materials from hoop.** After stitching is complete, remove tape from zipper.

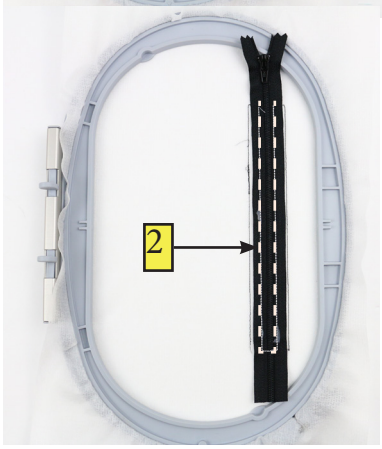

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Steps

5. Turn hoop to the wrong side facing up. Place the **Top Front Lining** right side down aligning one long edge to the top of the zipper stitch. Secure with tape along the top, bottom and both sides.

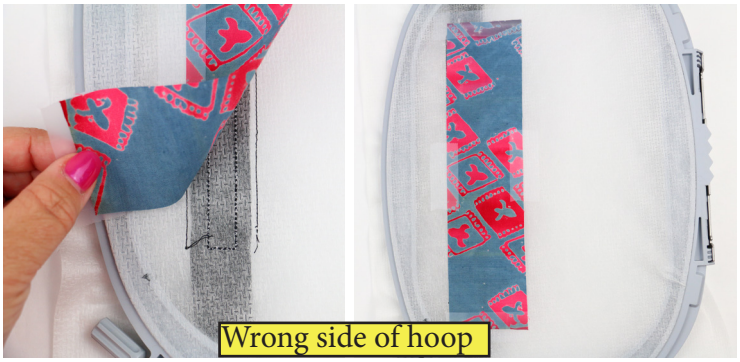

6. Turn hoop right side up. Place the **Top Front Cork** along the edge of the top zipper teeth. Secure with tape along the outer three sides. Insert hoop into machine. Sew **Stitch #3**, the top front/zipper secure stitch. **NOTE:** When stitching on machine, use fingers to gently hold the cork down as needed, avoide placing the take over the where the stitch will be.

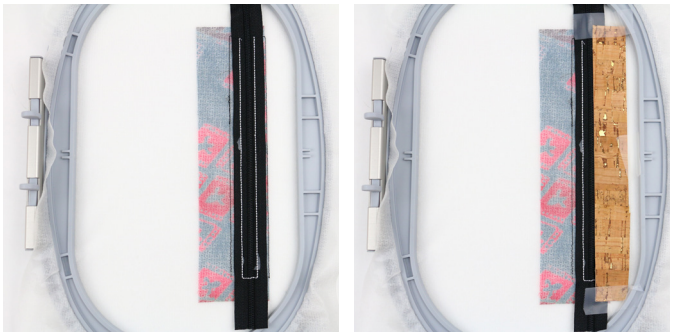

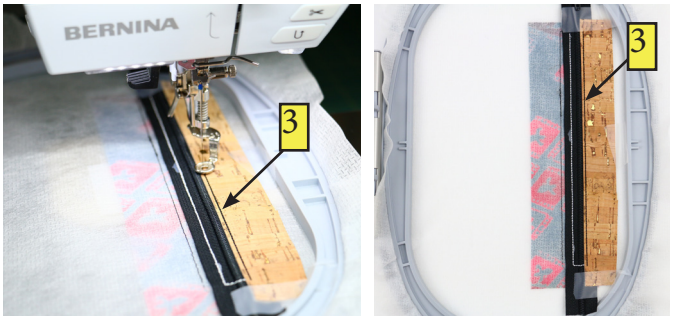

7. Remove hoop from machine and turn to the wrong side. Fold the **Top Front Lining** toward the side of the hoop (top of the clutch). Secure with tape.

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Steps

8. With hoop still wrong side facing up, place the **Front Bottom Lining** right sides down, over the **Top Front Lining** along the bottom zipper edge. Secure with tape.

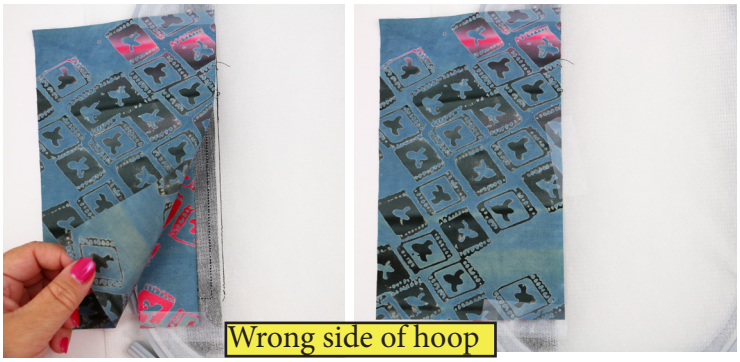

9. Turn hoop to right side up. Place the **Front bottom center/front fusible batting** (fused together) along the bottom zipper edge. Secure with tape.

10. Insert hoop into machine and sew **Stitch #4**, the lower zipper secure stitch. Remove hoop from machine and place on a flat surface. Fold the **Front Bottom Center** down, revealing the zipper. Secure the lower edge of the front with tape.
NOTE: Leave the Front Bottom Lining open.

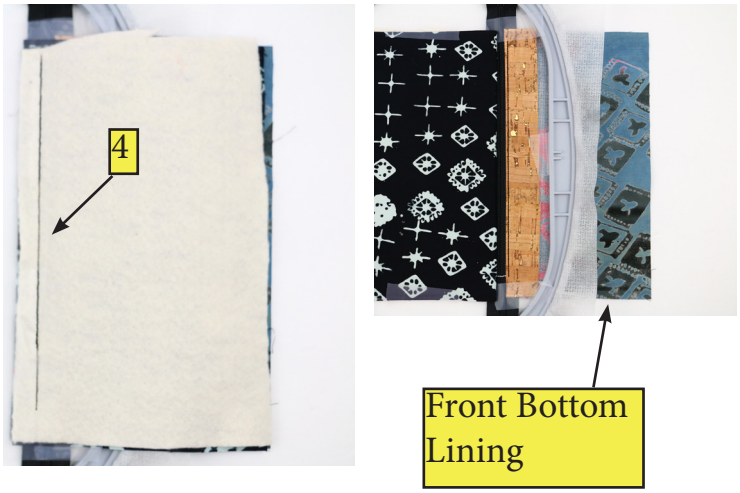

11. Insert hoop into machine. Sew **Stitch #5**, the front bottom center secure stitch. This will hold the **Front bottom center** to the stabilizer. Remove hoop. Using appliqué scissors cut away **ONLY** the **Front Bottom Center** material to the left of the stitching. **Leave the batting!!**

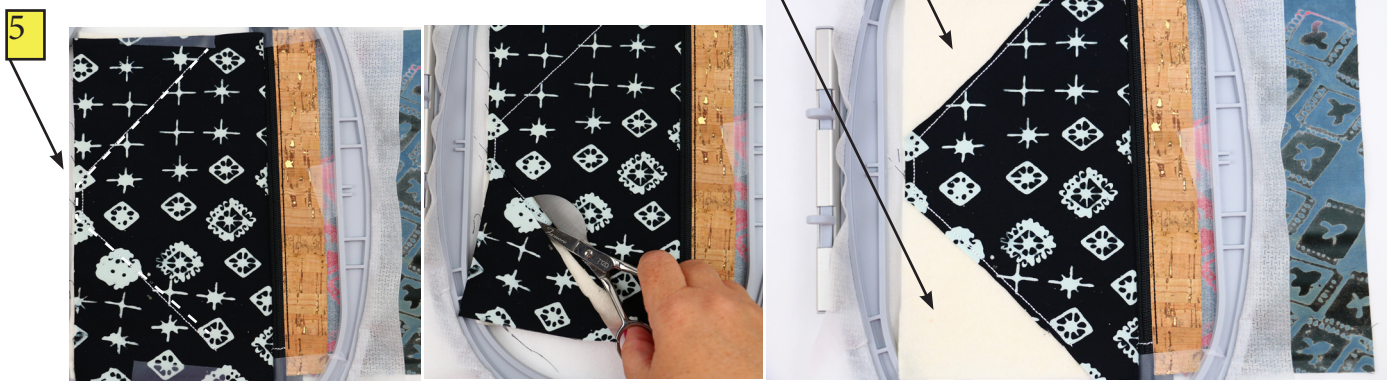

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Steps

12. Place the (**top**) **Front Bottom Corner** aligned with the top and left edge of the **Front Fusible Batting**. Insert hoop into machine and sew **Stitch #6**, the top front bottom corner secure stitch.

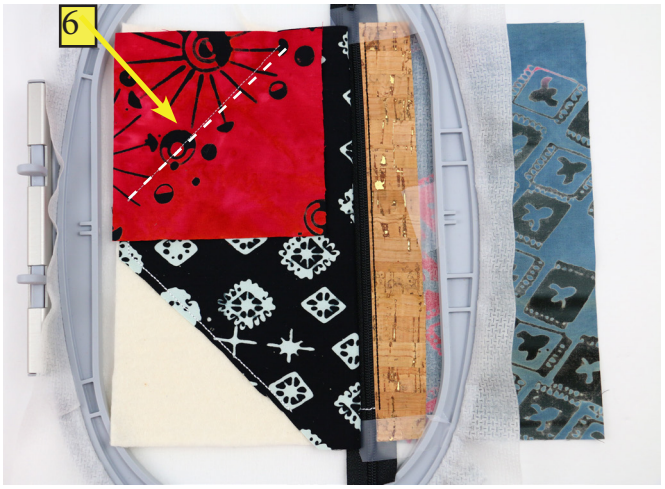

13. Remove hoop from machine and with appliqué scissors cut away the material to the right of stitch #6 leaving about 1/8". Discard material. Place the (**bottom) Front Bottom Corner** aligned with the bottom and left edge of the **Front Fusible Batting**. Insert hoop into machine and sew **Stitch #7**, the bottom front corner secure stitch. Remove hoop from machine and with appliqué scissors cut away the material to the right of the stitch #7 leaving about 1/8". Discard material.

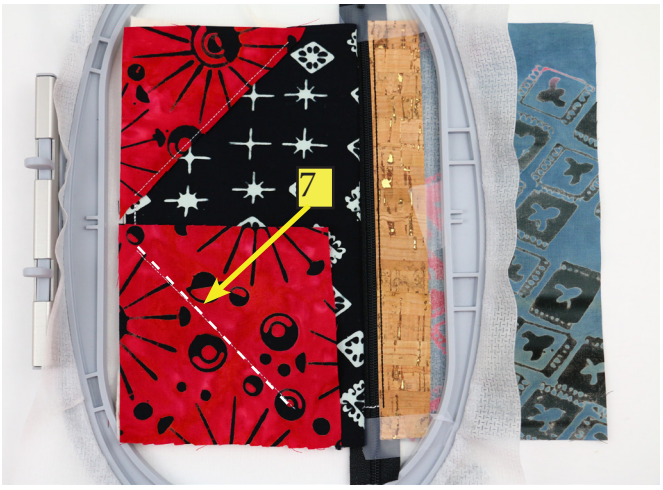

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Steps

14. Insert hoop into machine and sew **Stitch #8**, the front bottom cork piece placement stitch. Place the **(top) Front Bottom cork Piece** over the top portion of stitch #8. Secure the short ends with tape. Insert hoop into machine and sew **Stitch #9**, the (top) front bottom cork piece. Remove hoop from machine and place on a flat surface. Use appliqué scissors to cut along the two long edges leaving about 1/16"-1/8" cork. Do not cut the stitching. Repeat on the (bottom) with **Stitch #10**.

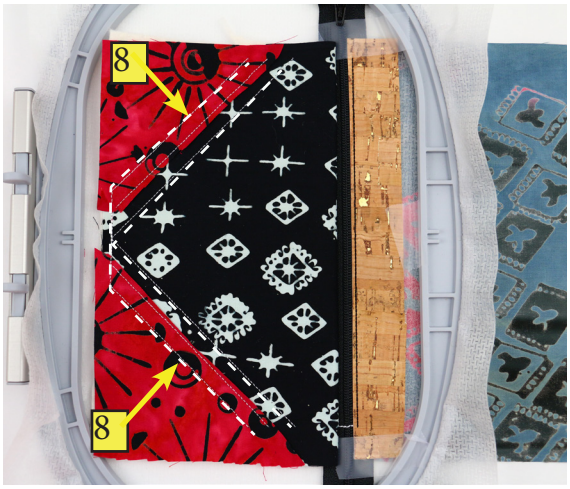

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Steps

15. Turn hoop to wrong side and fold the **Front Bottom Lining** toward the edge of the hoop, secure with tape. With hoop still facing wrong side up, place the **Back Lining,** right side down. This will cover the Top and Bottom Linings. Secure on all four sides with clear tape.

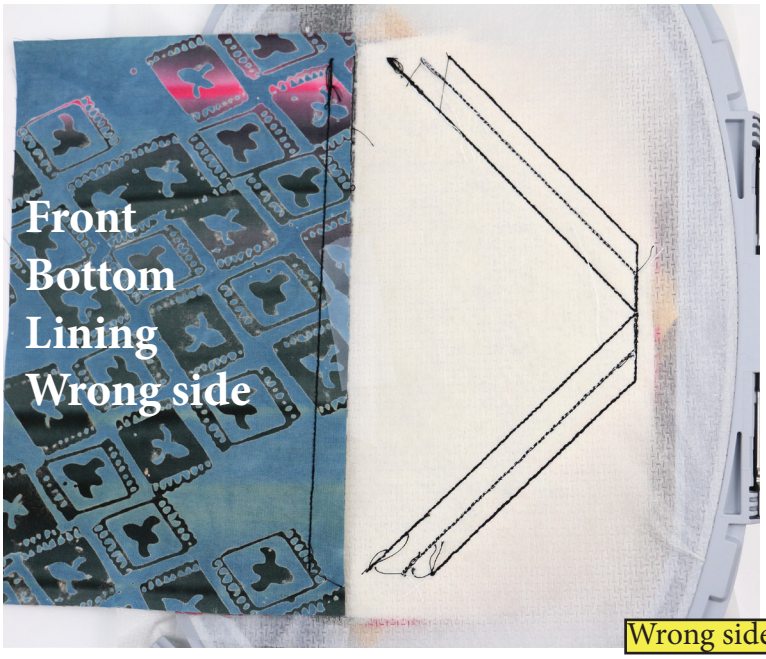

Wrong side of hoop

Wrong side of hoop

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Steps

16. Turn hoop to right side facing up. Fold the **Cork Side loop** around the 1" D-ring. Place ¼" below the zipper. Draw an imaginary line connecting the **(top) Front Bottom Cork piece** stitch and the top zipper stitch. Place the two raw edges ½" past this imaginary line.

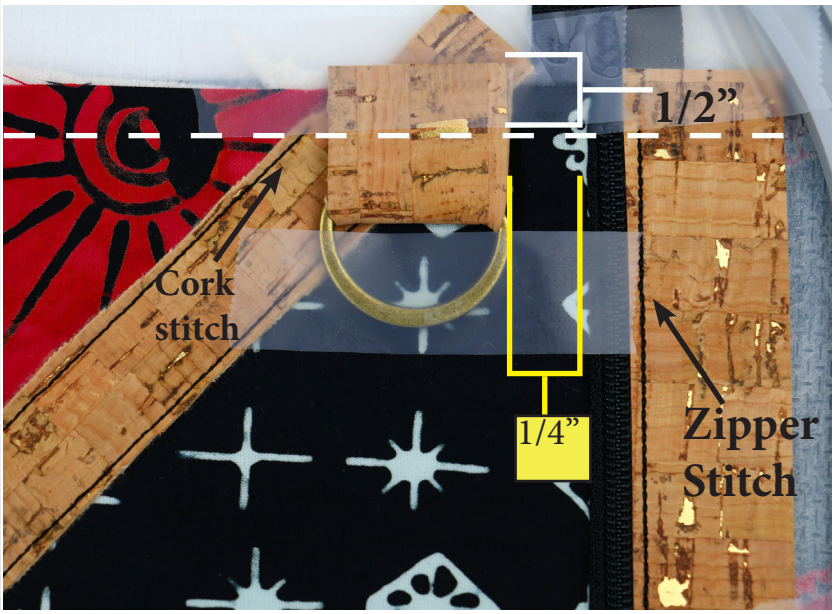

17. **VERY IMPORTANT!!**

Open zipper pull about 2/3rds way open. This way once the stitching is all complete the zipper will open.

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Steps

18. Insert hoop into machine. Sew **Stitch #11**, **Back lining** to the **Front**. Be sure the bottom front cork pieces and side loop lay flat when stitched. Remove hoop from machine, place on a flat surface. Below is a **front** and **back** hoop view of **Stitch #11**, the Back lining stitch.

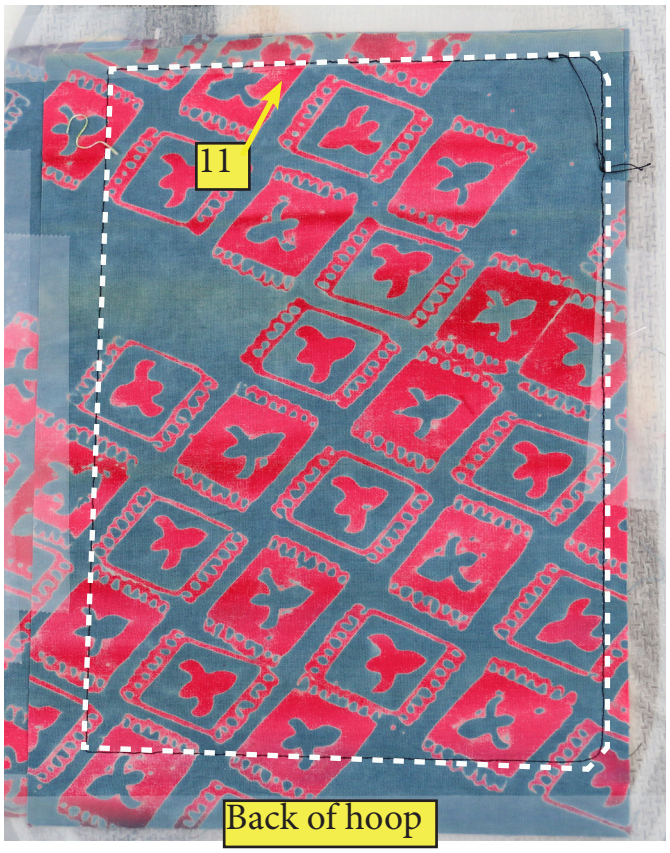

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Steps

19. Place the **Pocket** right side down (interfacing side closest to the front) with fold over top of the zipper and the two raw edges aligned with the lower edge of the zipper bag. Secure with tape.

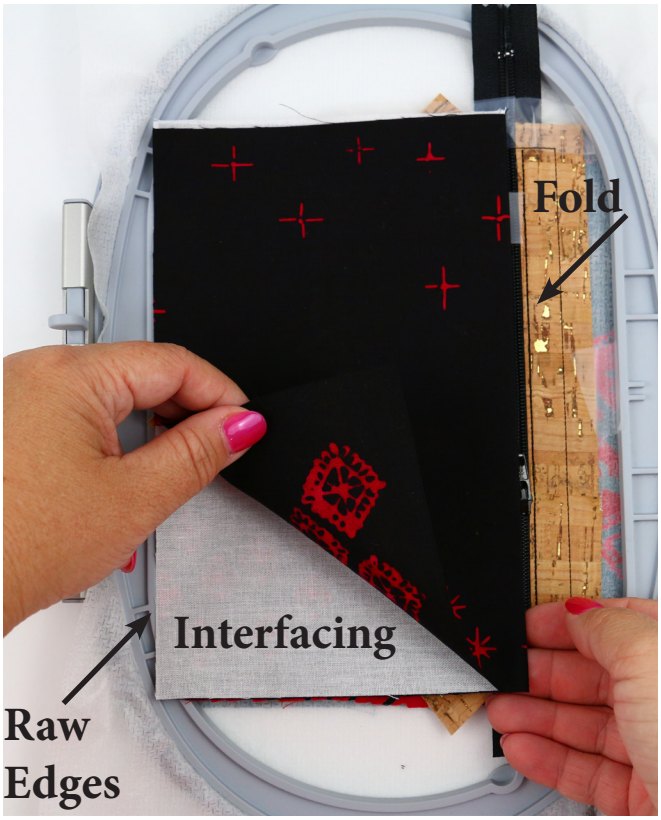

20. Insert hoop into machine and sew **Stitch #12**, the lower bag construction stitch/ pocket secure stitch.

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Steps

21. With hoop in machine, place the **Back** right side down. Cover all the front pieces and pocket. Place the **Back Foam** over the **Back**. Secure with tape. Sew **Stitch #13**, the final construction stitch.

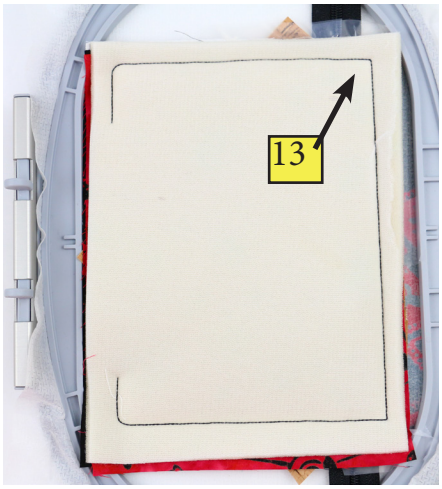

22. Remove hoop from machine and ALL materials from hoop. Cut ¼" around outside of stitching except bottom opening leave ½"-¾". Remove the **Foam** from the seam allowance opening.

Remove Foam

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Steps

23. Turn right side out revealing the lining and back pocket. Use the EZ Point and Turner and point turner as needed. Grade the seam allowance opening including the Foam. This will make the bottom of the bag less bulky in the seams.

24. Turn seam allowances inside seam opening and hold in place with wonder clips. Thread hand sewing needle and slip stitch the opening closed. Press and use point turner to reveal final outside corners (not shown).

25. Remove the stabilizer from the zipper opening. Use short sharp scissors or seam ripper.

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com

Diamond Diva Zipper Clutch

SWAST110

Steps - Sewing Machine Set up

26. Set up sewing machine with standard presser foot and universal sewing needle. Fold wrong sides together aligning long edges of the **Lanyard cork**. Sew along both short and long edges about 1/8" from edge.

27. Wrap one edge of the lanyard cork around the lobster, swivel clip/hook. Secure with wonder clips and stitch to secure. Attach to clutch and use tonight!

Follow Sue on all her social medias: Facebook, Instagram, Pinterest @SueOVeryDesigns watch Sue's weekly videos at www.SueOVeryTV.com

Copyright 2018 ©Sue O'Very Designs. All Rights Reserved. www.SueOVeryDesigns.com